


Acoustic Performance of PEPP vs. Standard EPP Foam

Density of 2.8 pcf (45 g/l) and thickness of 30 mm (1.2") for both products.

(Product performance can be optimized with changes in foam thickness and density)

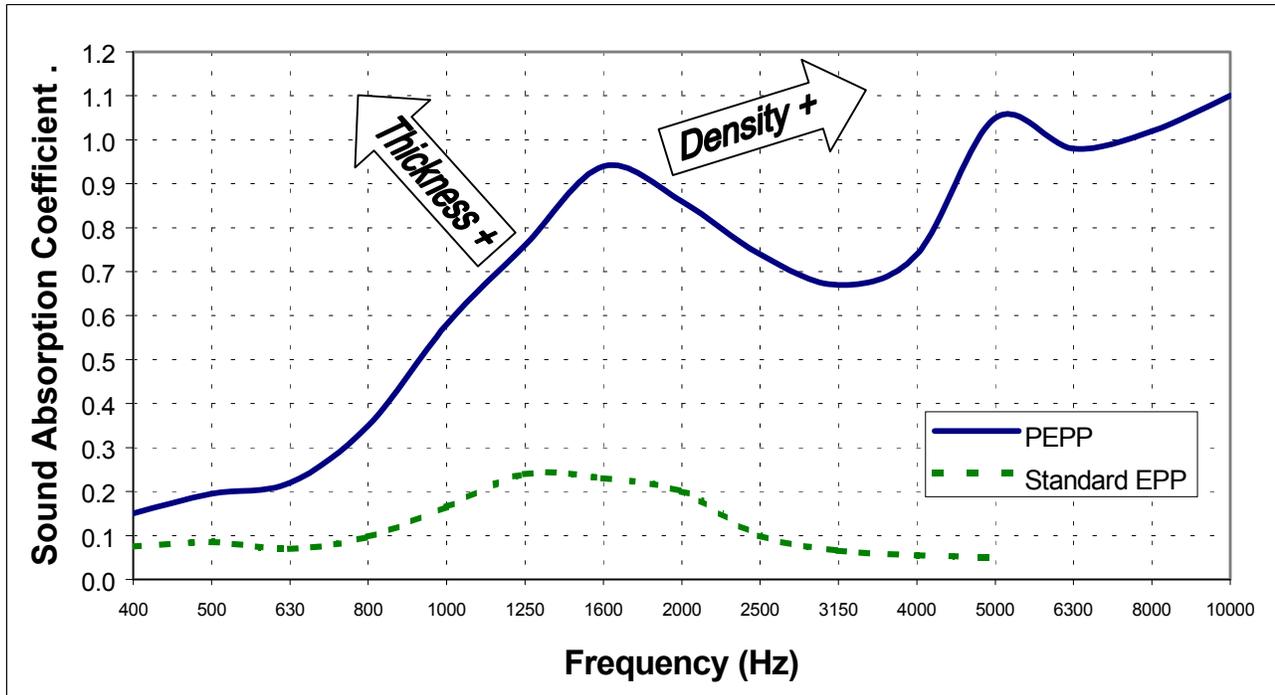

Note: Test Samples: Density = 2.8 pcf (45 g/l) and Thickness = 30 mm (1.2").
Alpha Cabin Measurements